LockSign / Technical Manual

Mounting Profile

dansign

Wall-Mounted Signs

Mounting brackets for individual signs are screwed directly to the wall.

Slide the sign front over the backplate. When the sign front engages with the spring, the sign is locked.

Place the square magnetic key in the upper left corner of the sign, and the sign front can then be slid left or right.

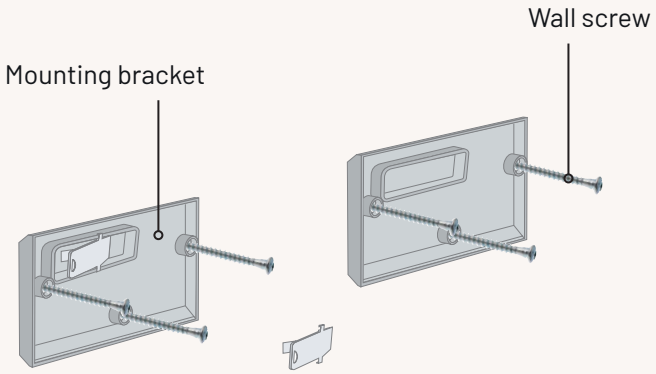

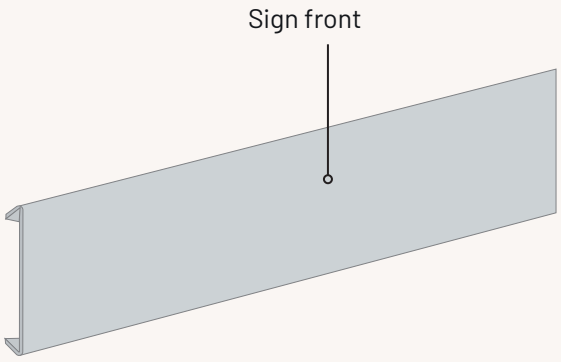

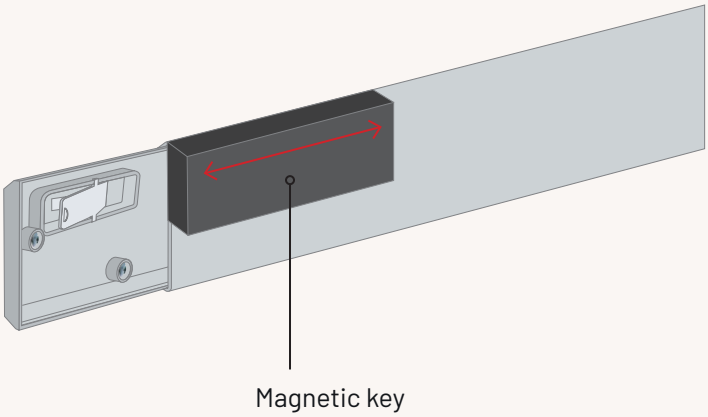

Wall-Mounted Signboards

Signs that are to be mounted one above the other are installed on an aluminum plate or individually directly on the wall.

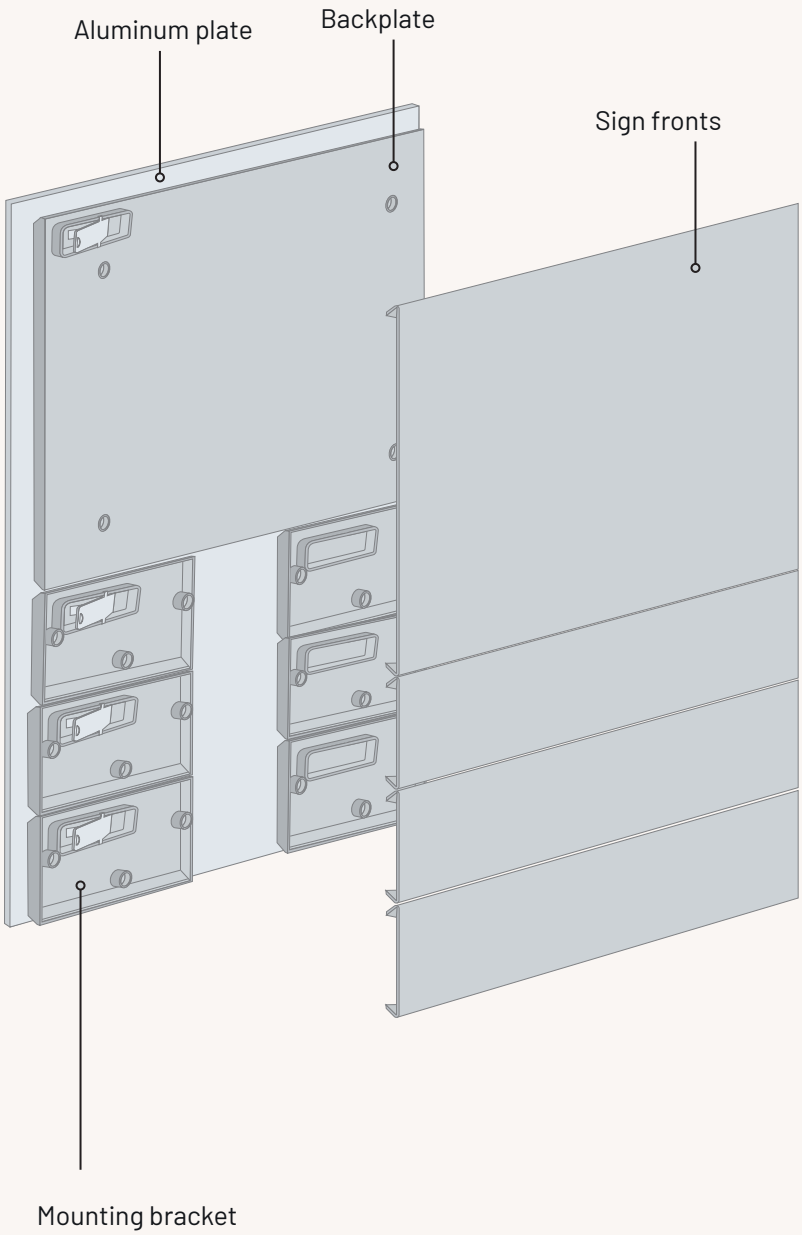

Projecting Signs
50 / 100 / 150 / 200 mm

The wall bracket is screwed into the wall.

Two sign fronts are slid over the wall bracket.

The fronts are locked with the locking screw.

The end piece is slid into the sign fronts and fastened with the locking screw.

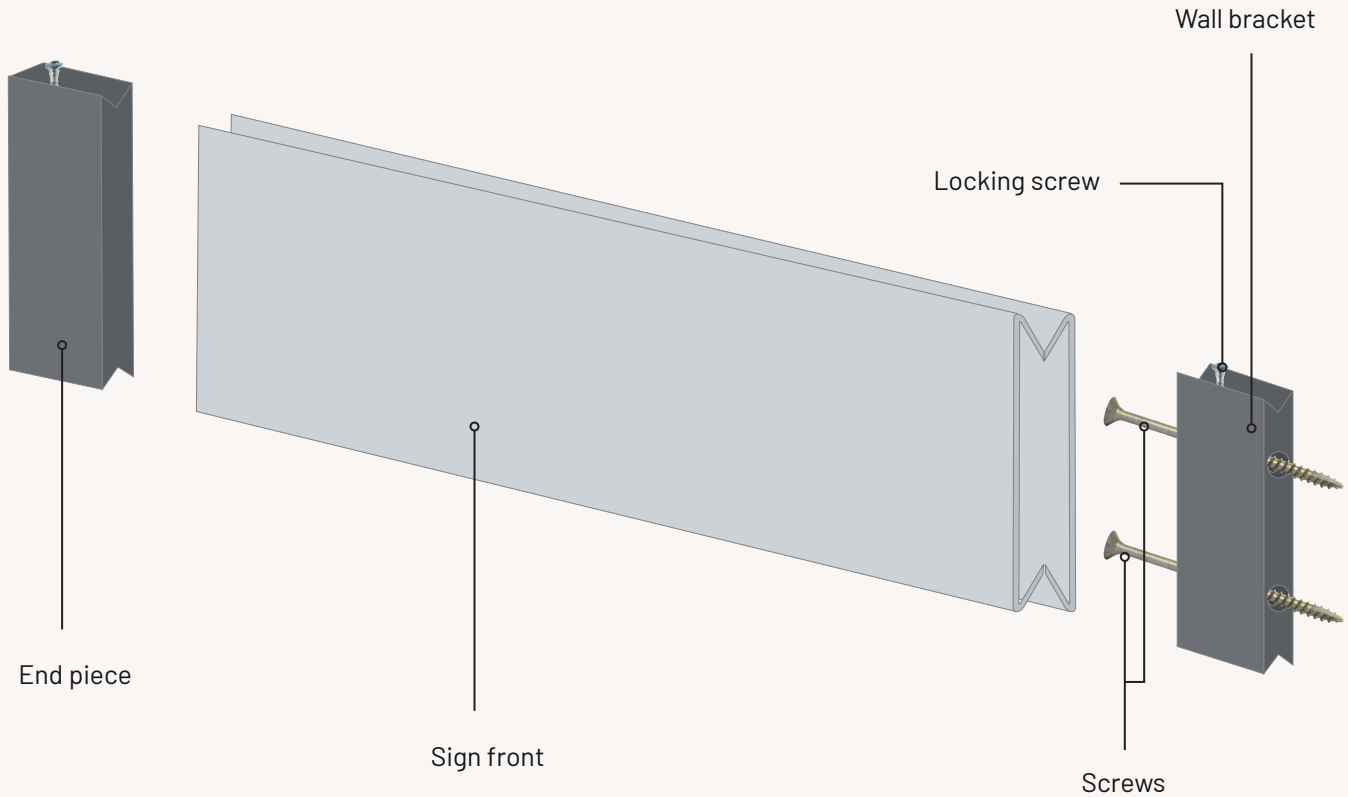

Suspended Signs

Suspended signs are mounted on a base of two mounting brackets.

The mounting brackets are screwed together back to back.

A hook is placed between the mounting brackets.

The signs are hung on two wires (approx. Ø 1.0 mm), and optional pendant tubes can be mounted on the wires.
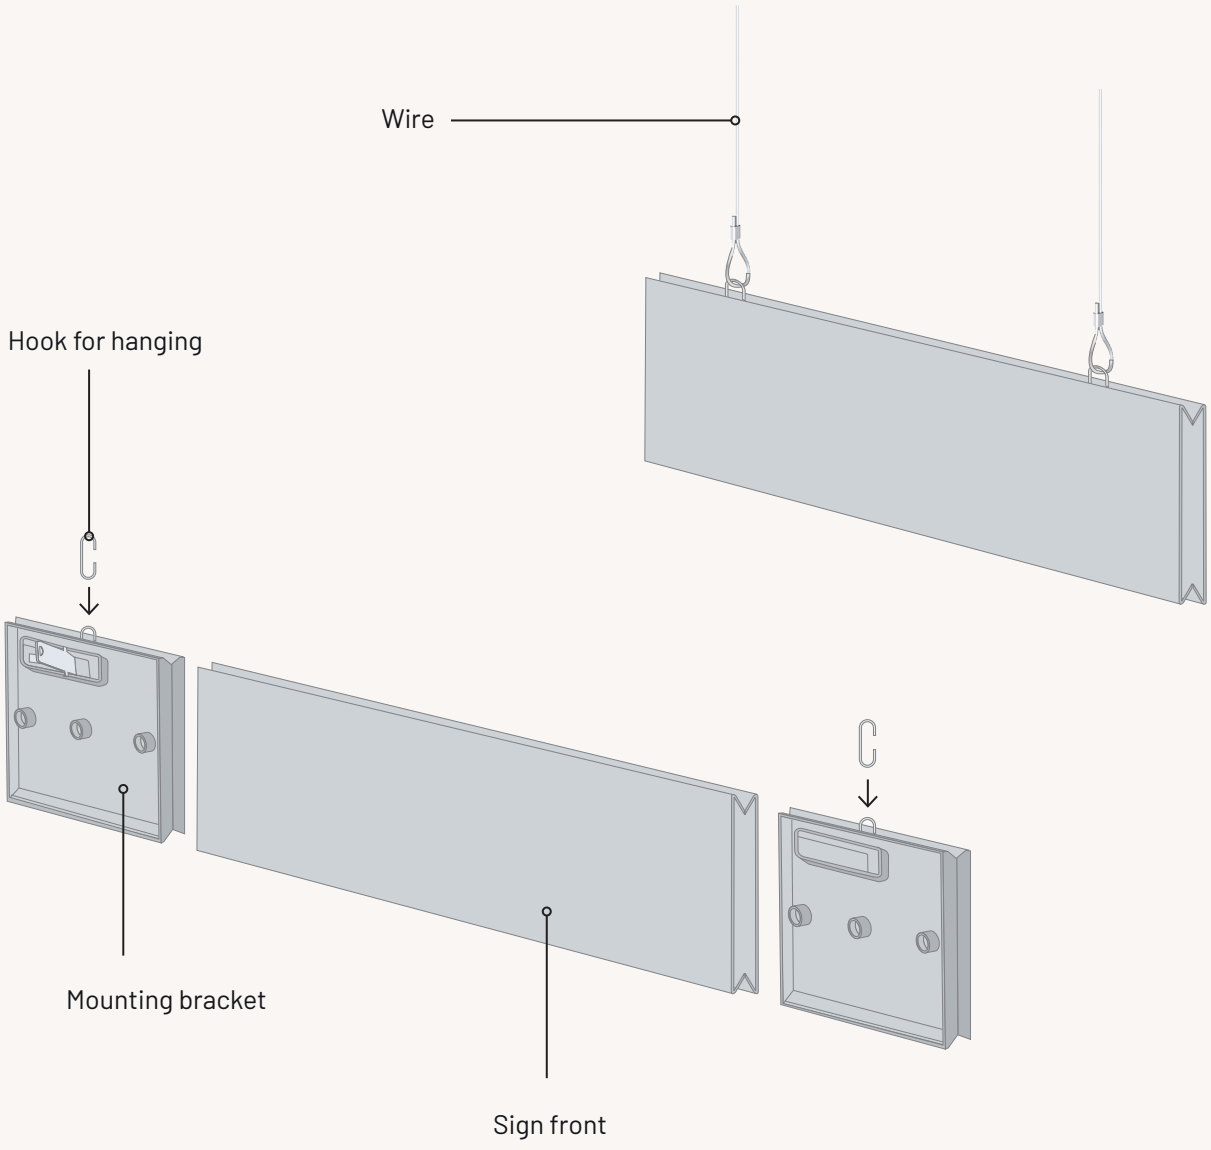
The wire is joined into a loop with a crimped ferrule.