PlanSign

Mounting of individual signs

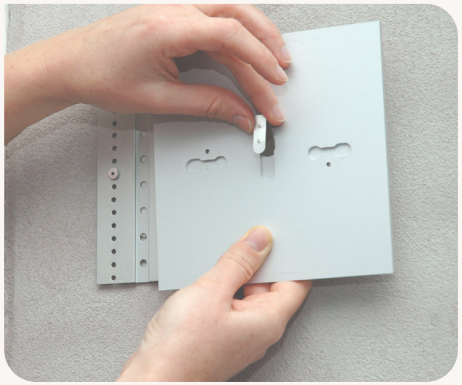

1.
The spring is placed into the recess on the back of the sign.

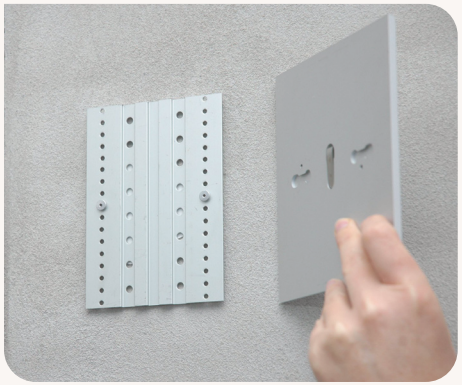

2.
The keyhole slots are aligned over the two rivets.

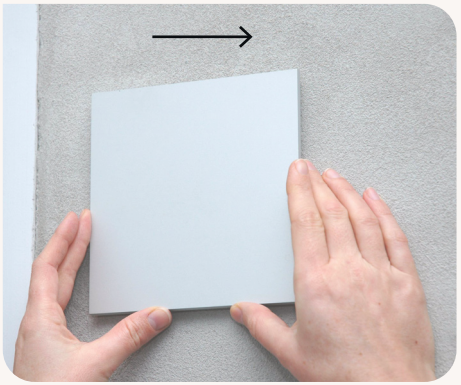

3.
The sign is slid 5–10 mm to the side.

4.
The sign and back plate click together and lock.

Dismounting of individual signs

1.
Place the magnetic key at the center of the

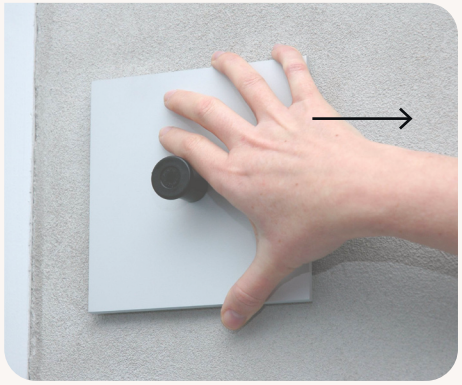

2.
The lock is released from the sign plate, and the sign is slid to

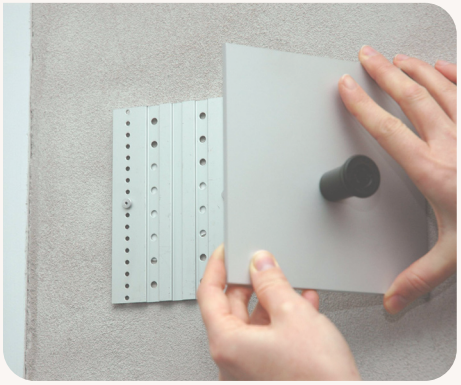

3.
Remove the sign.